



Delta Series offers the assurance of MC²'s highest quality audio power amp technology with future proofing via the inclusion of simple to use digital audio networking.

A rear panel switch allows the amplifier to accept either two channels of analogue audio or pick up two channels of networked audio, via Dante, which is then converted using 24 bit 96kHz ADCs.

Running cool in even the most difficult conditions, the Delta 120 can deliver 2 x 4600W into 4 ohms with all channels driven, and over 6000W per channel into 2.7 ohm loads, with outstanding distortion and noise figures right up to maximum output. This power is maintained even with reduced mains voltages thanks to generous limiter headroom.

Connect to a Delta DSP amplifier using a single CAT5 cable to realise a stereo 3 way system with no further external processing required. Switch back to analogue to use as a powerful traditional dual mono amplifier.

Link adjacent inputs for total flexibility in either analogue or digital mode.

Main Specifications

Output Power (per channel): 8 ohms: 2400W, 4 ohms: 4600W, 2.7 ohms: 6250W, 2 ohms: 6800W*

Measured using continuous music with Crest Factor of 4.8 (14dB)

Output Power (bridged): N/A

THD: (@1dB below maximum output power) @ 1kHz < 0.08%, 20Hz to 20kHz < 0.1%

Gain / Sensitivity: Gain 26/32dB Sensitivity (for maximum power) +13.0dBu (3.5V)

Frequency Response: 20Hz to 20kHz (±0.5dB)

Power Consumption: Nominal @ 240V into 4 ohms 6.4A, nominal @ 120V into 4 ohms 13.2A

Dimensions: Amplifier (2U) (mm) 88(h) x 482(w) x 428(d)

Boxed (shipping size - UK) 230 x 580 x 560 (Single boxed)

Boxed (shipping size - all except UK) 250 x 610 x 600 (Double boxed)

Weight: Amplifier 12.2kg (26.9lbs), Boxed (shipping weight) 14.2kg (31.3lbs)

DELTA 120

Additional Specifications

Input Impedance: 20k ohms (Active balanced)

Input CMRR: > 60dB **Damping Factor:** >400 (8 ohms / 1kHz)

Input Sources: 2 x Analogue, 2 x Networked Audio (Switchable as a pair)

Signal Limiters: Operate at maximum power to prevent excessive clipping

Protection: Output short circuit, DC; Over-temperature; Mains in-rush control, over voltage, over current.

Output Power(per channel):

Continuous music (with Crest Factor of 2.8 (9dB)): 2350W (8R), 4500W (4R), 6050W (2.7R)

Continuous music (with Crest Factor of 4.8 (14dB)): 2400W(8R), 4600W(4R), 6250W(2.7R)

Continuous music (with Crest Factor of 7.8 (18dB)): 2450W(8R), 4700W (4R), 6350W (2.7R)

For details of Power measurement methods please refer to the Technical Support area of our website.

*2.7 ohm power quoted for highest single ended output and greatest efficiency (3 x 8 ohm parallel drivers). Amplifier is stable with 2 ohm loads.


DELTA 120

Power Consumption & Thermal Emissions

Mains (V)	Load (R)	Current Draw (A)				Thermal Emissions (W)			
		No Sig'l	Light	Average	Heavy	No Sig'l	Light	Average	Heavy
240	8	1.8	2.7	4.3	8.2	432	457	499	601
240	4	1.8	3.5	6.4	13.4	432	477	553	737
240	2.7	1.8	3.9	7.5	16.1	432	487	582	809
120	8	4.0	5.9	9.1	16.8	480	505	547	649
120	4	4.0	7.4	13.2	27.1	480	525	601	785
120	2.7	4.0	8.2	15.3	32.6	480	535	630	857

No Sig'l = Quiescent, Light = Crest Factor of 7.8(18dB), Average = Crest Factor of 4.8(14dB), Heavy = Crest Factor of 2.8(9dB)
For details of measurement methods please refer to the Technical Support area of our website.

DELTA 120

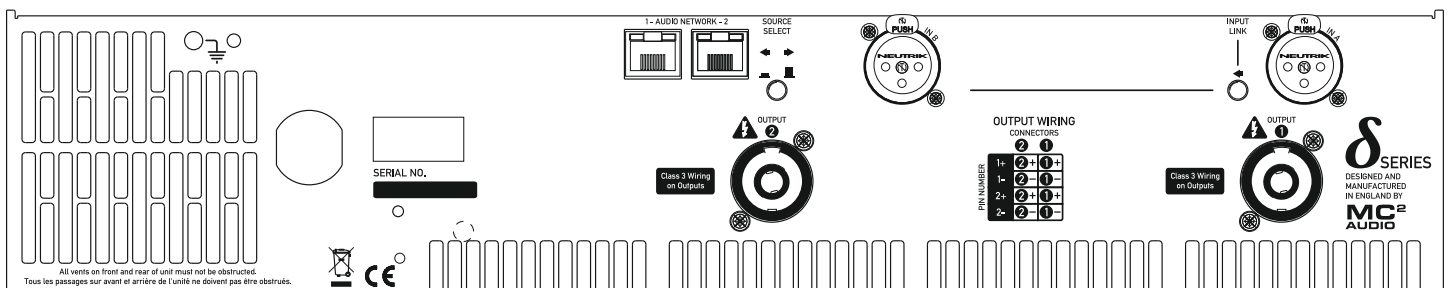

Controls, Indicators & Connectors

- Front Panel:** 1 x Power Switch, 1 x STBY LED (orange)
2 x 6 point LED level indicators, 2 x level controls
1 x Channel Audio LINK LEDs (yellow)
1 x PROTECTION LED (red)
1 x POWER LED, 1 x ANALOGUE LED, 1 x NETWORK AUDIO LED (3 x yellow)
- Rear Panel:** 2 x Neutrik Speakon output connectors (4 pole)
2 x Neutrik XLR female connectors (audio input)
2 x Ethernet RJ45 (Audio Network)*
1 x Channel Link Switch
- 1 x Analogue/Network Audio Source Select Switch
Captive mains cable

*Dante Audio Network is a factory fit option

DELTA 120

Architect's and Engineer's Specification

The power amplifier shall be a 4 channel class D design with a minimum guaranteed power of 4600W into 4R (20Hz to 20kHz). THD shall be better than 0.1% (20Hz to 20kHz). The minimum load shall be 2R(2.7R recommended), and input sensitivity shall be 13.0dBu for full power output. Frequency response shall be 20Hz to 20kHz (±0.5dB).

The front panel shall have individual input level controls each with a 6 point LED meter showing output level and onset of limiting. A front panel non-isolating main power switch shall be fitted. The rear panel shall have outputs on Neutrik Speakon connectors, with 1+/1- and 2+/2- pairs being wired in parallel for increased current carrying capability (4 pole).

The audio inputs shall be on Neutrik 3 pole XLR connectors. Inputs to channels shall be linkable via a channel link switch, with corresponding indication on the front panel.

The amplifier shall accept analogue or networked audio if fitted with the optional Dante network audio card with source switching for both channels on the rear panel and front panel indication of either analogue or digital source.

The amplifier shall be 2U, 19" rackmount in format with dimensions of 8.8cm X 48cm X 43cm and a weight of 12.2kg. AC mains supply shall be switchable between 120V(60Hz) and 240V(50Hz). The amplifier shall be designated the MC² Delta 120.